



HYC

Hydraulic covers C250

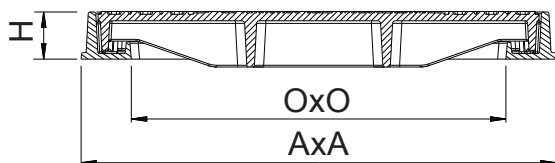

EN 124 by

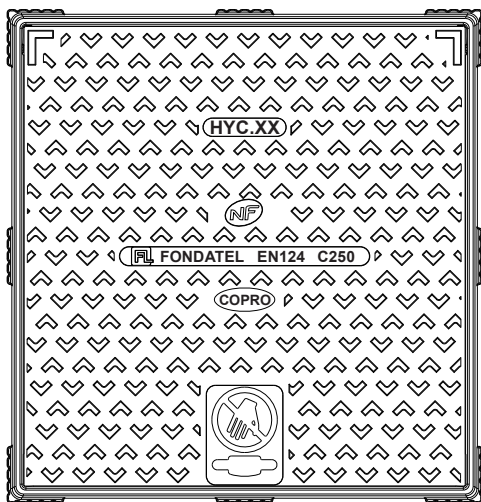

EN 124 by



square frame



DESCRIPTION

Hydraulic covers C250

ADVANTAGE PRODUCT

Efficient articulation

- Frame with single continuous sealing groove, avoiding smell.
- Unique form of cover so that there is only way to put cover into frame, to avoid noise.
- Antiskid design for low noise nuisance

Implementation and use

- 8 anchorings rims for an easy installation
- Keyhole to facilitate opening process
- Also available:
 - in class B125→HY
 - in class D400→HYL

MATERIAL

Ductile iron GJS 500-7 depending on EN1563

COATING

Black water paint non-toxic and non-polluting

CERTIFICATION THIRD PARTY

- Brand name NF-VOIRIE
- This brand certify the referential conformity NF-110 thanks to a permanent control exercised by AFNOR CERTIFICATION / 11 francis de pressense street F-93571 LA PLAINE SAINT DENIS CEDEX and accessible on www.marque-nf.com
- Certified EN124 by Copro

PLACE OF INSTALLATION

Group 3, class C250 → see EN124

Pavements, pedestrianised areas and similar surfaces, parking areas and multi-storey car parks.

OPTION

Lifting key (200 001)



REFERENCE	ART.N°	DIMENSIONS			KG	PACK.
		A X A	O X O	H		
HYC 40	845240	414 x 434	296 x 305	51	23	20/40
HYC 50	845250	514 x 534	396 x 405	51	33	20
HYC 60	845260	612 x 632	496 x 505	51	44	10
HYC 70	845270	712 x 732	596 x 605	51	60	5/10
HYC 80	845280	812 x 832	696 x 705	51	72	5/10

The validity of this data sheet can be verified on the website of AFNOR (<http://cdn.afnor.org/download/produits/FR/NF110.pdf>)

The validity of the data sheet can be verified on the COPRO website (www.copro.eu)

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.