
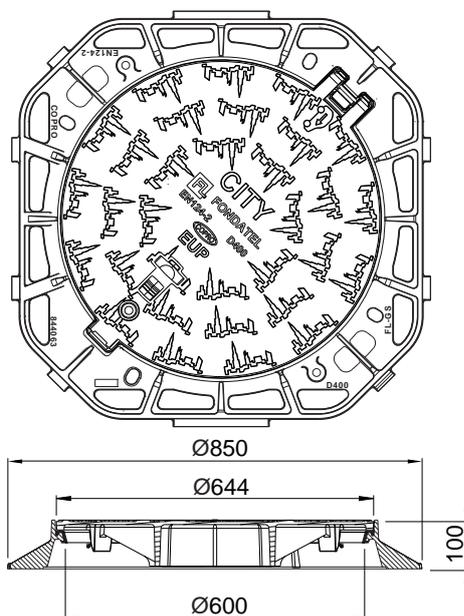


# CITY

## Manhole cover D400

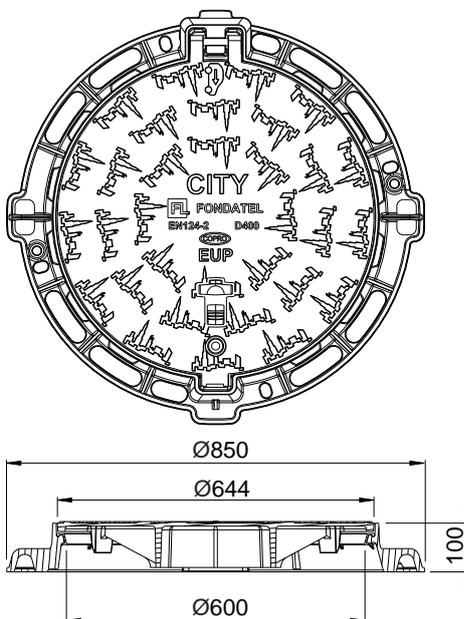

EN124-2 by 	medium traffic 	round or square frame round cover 	locking 	seal 
----------------	--------------------	--	-------------	----------

### DESCRIPTION

Manhole cover hinged lockable D400 average traffic.

### ADVANTAGE PRODUCT

#### Efficient articulation

- Opening of the cover at > 110° for easy access and for the safety of the operators.
- Cover is removable at a 90°.
- Self-cleaning articulation at the time of opening.

#### Silence and stability

- Polyethylene joint exchangeable clipped in the frame on the zone of support of cover
- Manhole comprising alignment tabs in the frame
- Antiskid design for low noise nuisance

#### Implementation and use

- Frame with square base or round frame.
- 2 handling rings on the base of frame.
- Indication of the optimal traffic direction.
- Reinforced frame, particularly rigid, with a base of frame little perforated, provide a large supporting surface for an effective sealing.
- 4 holes on the base of frame for a possible pegging.
- Locking of the pad by clamping it against the frame, at 1 point opposite the hinge, by rotating, in a clockwise direction, the locking tab actuated by an M16 hexagonal screw.
- Deblocking is accomplished by reverse rotation
- Locking/unlocking using a pipe wrench 24 mm
- A sealed box maneuver for opening by a pickaxe or hook.
- Possibility to take off plastic clip in order to make hole in box (to have an automatic cleaning box).

### MATERIAL

Ductile iron GJS 500-7 depending on EN1563

### CERTIFICATION THIRD PARTY

EN124-2 certification by COPRO

### PLACE OF INSTALLATION

Group 4, class D400 → see EN124-1

Intended particularly for secondary roads and parking areas.

REFERENCE	ART.N°	KG	PACK.
CITY R round	844060	56	10
CITY C square	844069	60	10

The validity of the data sheet can be verified on the COPRO website <https://extranet.copro.eu/fr>

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.