






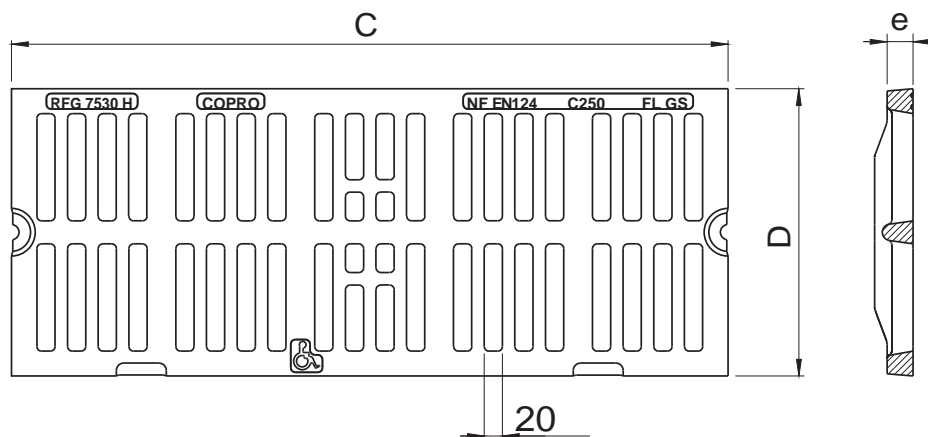

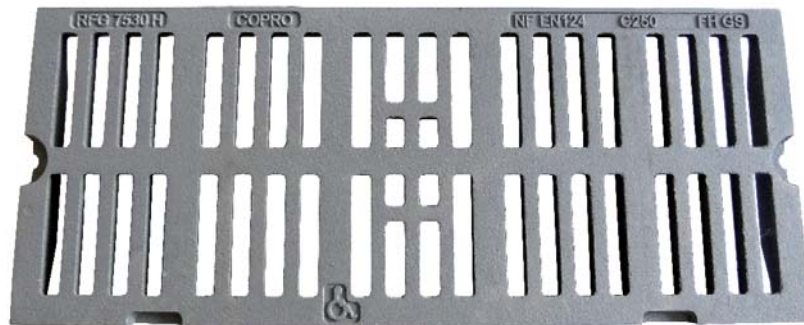

## RFG Trench gratings

### Grating with mechanical chaining



REFERENCE	DIMENSIONS			KG	CLASS	PACK.
	C	D	E			
<b>RFG 7520</b>	750	200	27	17	<b>C 250</b>	50
<b>RFG 7525</b>	750	250	27	19,5	<b>C 250</b>	45
<b>RFG 7530</b> 	750	300	27	23	<b>C 250</b>	30
<b>RFG 7535</b> 	750	350	27	23,5	<b>C 250</b>	30
<b>RFG 7540</b> 	750	400	27	29	<b>C 250</b>	30
<b>RFG 7550</b> 	750	500	27	36,5	<b>C 250</b>	20
<b>RFG 7560</b> 	750	600	27	49	<b>C 250</b>	10
<b>RFG 7570</b> 	750	700	27	76	<b>C 250</b>	10
<b>RFG 5012</b>	500	123	20	4	<b>C 250</b>	150

- **EN 124 certification by COPRO**
- Supporting beam for grating of 750 mm
- Ductile iron FGS 500-7



In conformity with decree n° 99-756  
(accessibility for disabled)