

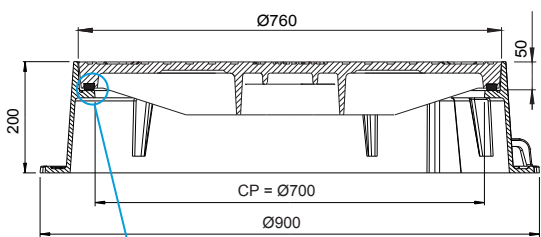


ARTI 5 B NV

Manhole cover D400

	heavy traffic 	round frame 	hinged 	non ventilated 	seal 	security 	OPTION LOGO 	OPTION locking 	OPTION ventilated 	OPTION watertight
--	-------------------	-----------------	------------	--------------------	----------	--------------	--------------------	-----------------------	--------------------------	--------------------------

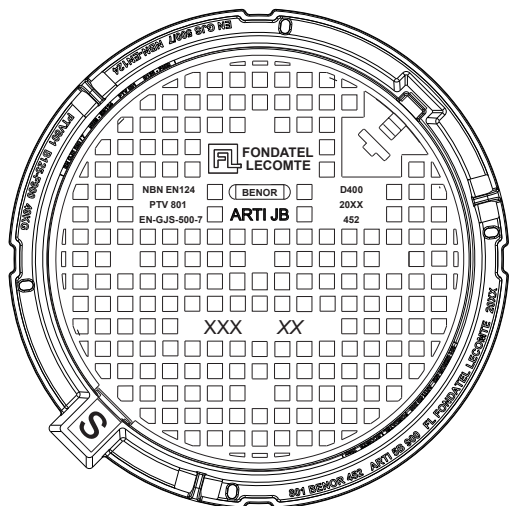

DESCRIPTION

Hinged manhole cover D400 non ventilated, for heavy traffic.

ADVANTAGE PRODUCT

Efficient articulation

- Hinging automatic cleaning (when opening)
- Opening of the cover at >110° for easy access
- Security: covers blocks at 90° when opening.
- For closing cover: additional manipulation (lifting cover) needed before closing cover.
- Cover is removable at 90°.

Silence and stability

- Round frame height 200mm with clear opening 700mm.
- EPDM sealing in machined opening cover on whole diameter, to guarantee perfect sealing.
- Antiskid design for low noise nuisance

Implementation and use

- 3 handling rings on the base of frame.
- Reinforced frame
- 4 holes for possible fastening to the ground.
- Keyhole in order to facilitate opening.

MATERIAL

Ductile iron GJS 500-7 depending on EN1563

COATING

Black water paint non-toxic and non-polluting

CERTIFICATION THIRD PARTY

Certified EN124 BENOR PTV801 by Copro

PLACE OF INSTALLATION

Group 4, class D400 → see EN124

Carrageways of roads (including pedestrian streets), hand shoulders and parking areas, for all types of road vehicles

OPTION

- Locking by means of 4 locking devices.
- Ventilated cover
- Marking/logo on request
- 1 BAR watertightness

REFERENCE	ART.N°	KG	PACK.
Arti 5 B D400 NV	215055	126	7

The validity of the data sheet can be verified on the COPRO website (www.copro.eu)

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.